PD-20542 rev. B 11/99

International
IOR Rectifier

43CTQ...
43CTQ...S
43CTQ...-1

SCHOTTKY RECTIFIER

40 Amp

Major Ratings and Characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	40	A
V_{RRM}	80/100	V
I_{FSM} @ tp = 5 µs sine	850	A
V_F @ 20 Apk, T_J = 125°C (per leg)	0.67	V
T_J range	-55 to 175	°C

Description/Features

This center tap Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175° C T_J operation
- Center tap configuration
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

43CTQ...	43CTQ...S	43CTQ...-1
		
TO-220	D^2PAK	TO-262

Voltage Ratings

	Parameters	43CTQ080 43CTQ080S 43CTQ080-1	43CTQ100 43CTQ100S 43CTQ100-1
V_R	Max. DC Reverse Voltage (V)	80	100
V_{RWM}	Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

	Parameters	Values	Units	Conditions	
$I_{F(AV)}$	Max. Average Forward (Per Leg)	20	A	50% duty cycle @ T_C = 135°C, rectangular wave form	
	Current * See Fig. 5 (Per Device)	40			
I_{FSM}	Max. Peak One Cycle Non-Repetitive	850	A	5µs Sine or 3µs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied
	Surge Current (Per Leg) * See Fig. 7	275		10ms Sine or 6ms Rect. pulse	
E_{AS}	Non-Repetitive Avalanche Energy (Per Leg)	7.50	mJ	T_J = 25 °C, I_{AS} = 0.50 Amps, L = 60 mH	
I_{AR}	Repetitive Avalanche Current (Per Leg)	0.50	A	Current decaying linearly to zero in 1 µsec Frequency limited by T_J max. V_A = 1.5 x V_R typical	

Electrical Specifications

	Parameters	Values	Units	Conditions	
V_{FM}	Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.81	V	@ 20A	T_J = 25 °C
		0.98	V	@ 40A	
		0.67	V	@ 20A	T_J = 125 °C
		0.81	V	@ 40A	
I_{RM}	Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1	mA	T_J = 25 °C	V_R = rated V_R
		11	mA	T_J = 125 °C	
$V_{F(TO)}$	Threshold Voltage	0.71	V	T_J = T_J max.	
r_t	Forward Slope Resistance	0.43	mΩ		
C_T	Max. Junction Capacitance (Per Leg)	1480	pF	V_R = 5V_{DC}, (test signal range 100Khz to 1Mhz) 25°C	
L_S	Typical Series Inductance (Per Leg)	8.0	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V_R)	10,000	V/ µs		

(1) Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

	Parameters		Values	Units	Conditions
T_J	Max. Junction Temperature Range		-55 to 175	°C	
T_{stg}	Max. Storage Temperature Range		-55 to 175	°C	
R_{thJC}	Max. Thermal Resistance Junction to Case (Per Leg)		2.0	°C/W	DC operation
R_{thJC}	Max. Thermal Resistance Junction to Case (Per Package)		1.0	°C/W	DC operation
R_{thCS}	Typical Thermal Resistance, Case to Heatsink		0.50	°C/W	Mounting surface, smooth and greased (only for TO-220)
wt	Approximate Weight		2 (0.07)	g (oz.)	
T	Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)	
		Max.	12 (10)		

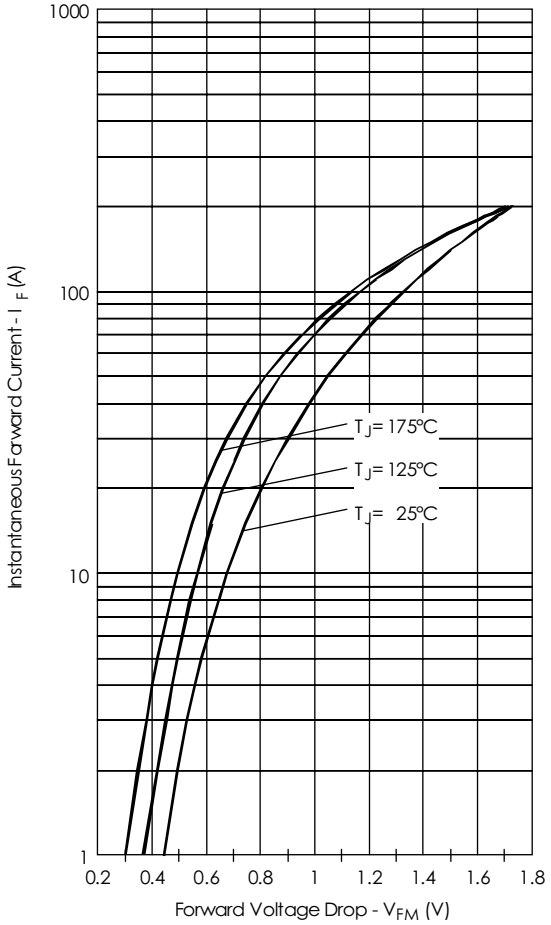


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

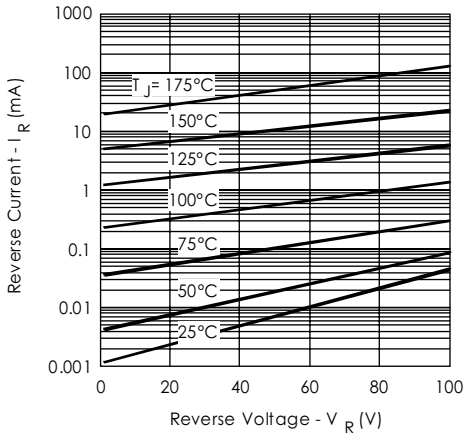


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

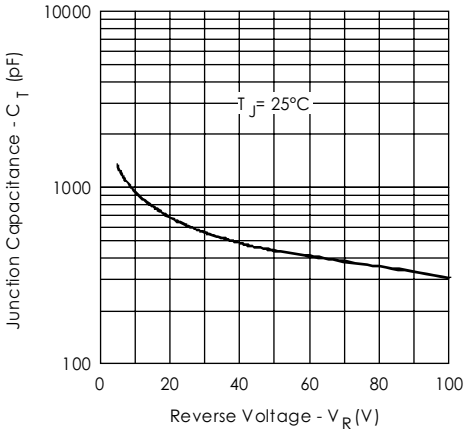


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

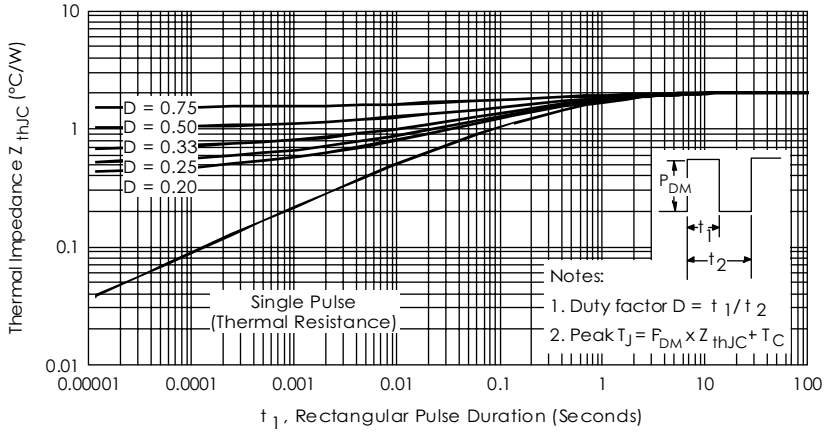


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (PerLeg)

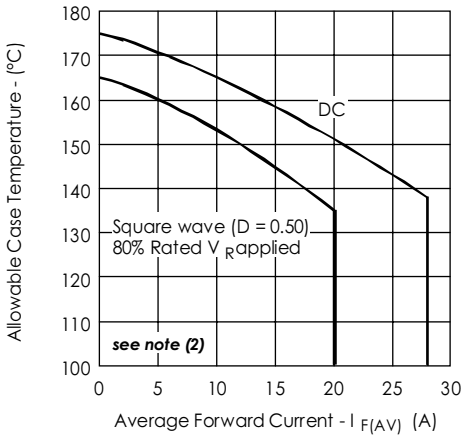


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

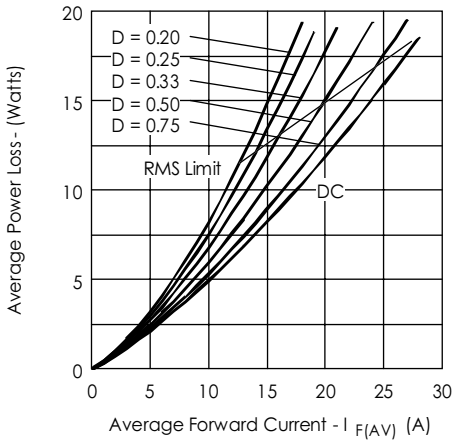


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

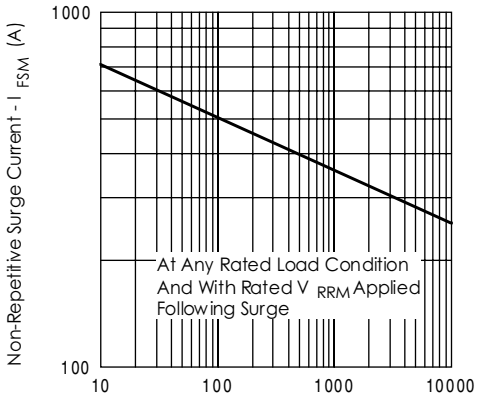


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

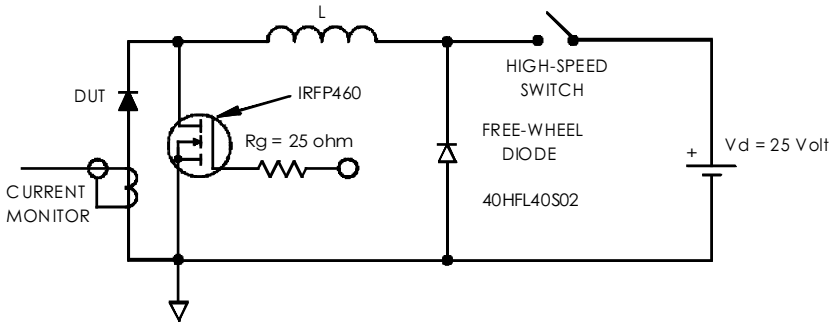


Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM}$ @ ($I_{F(AV)}$ / D) (see Fig. 6);
Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; I_R @ V_{R1} = 10 V


Ordering Information Table

Device Code

43	C	T	Q	100	-1
1	2	3	4	5	6


1 - Essential Part Number
2 - C = Common Cathode
3 - T = TO-220
4 - Q = Schottky Q Series
5 - Voltage Rating — 080 = 80V, 100 = 100V
6 - 1 = TO-262
S = D^2Pak

Outline Table

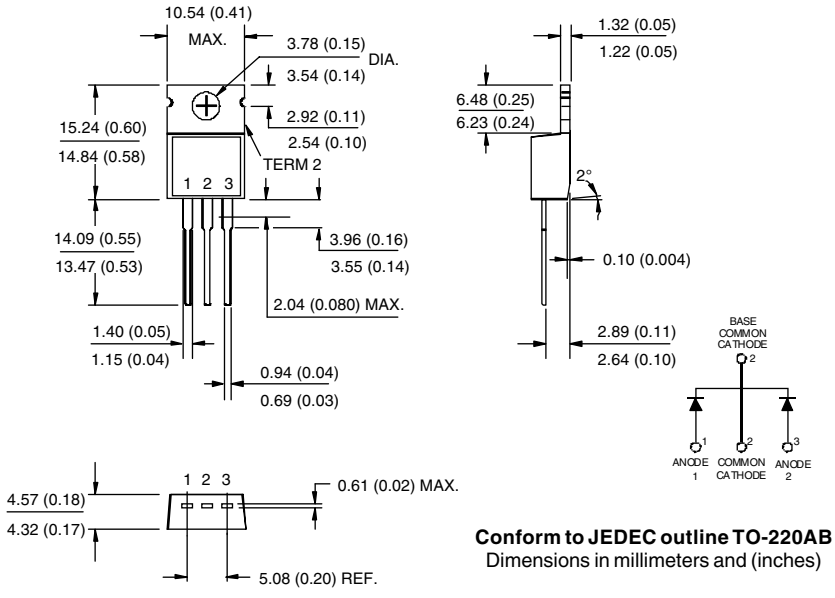


Conform to JEDEC outline TO-220AB
Dimensions in millimeters and (inches)

Outline Table

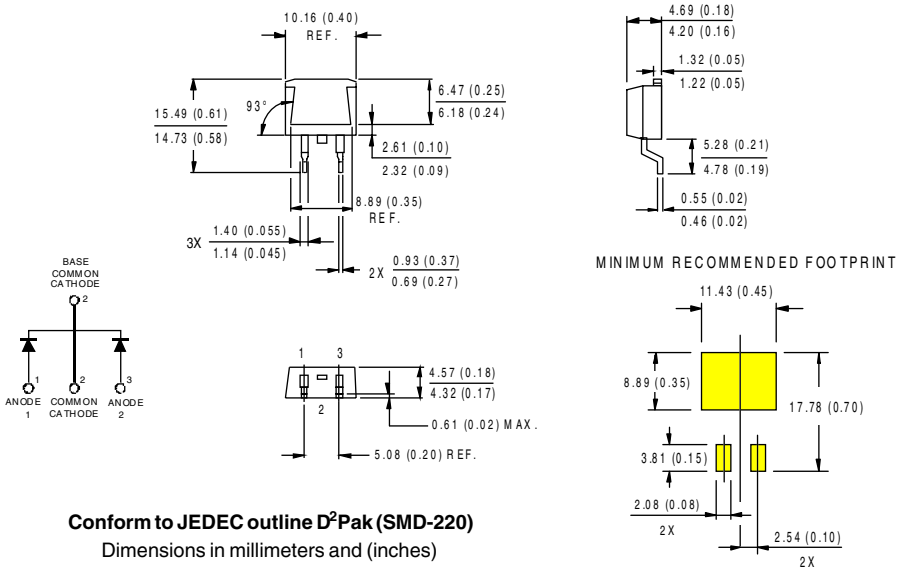

Conform to JEDEC outline D^2Pak (SMD-220)
Dimensions in millimeters and (inches)

Tape & Reel Information

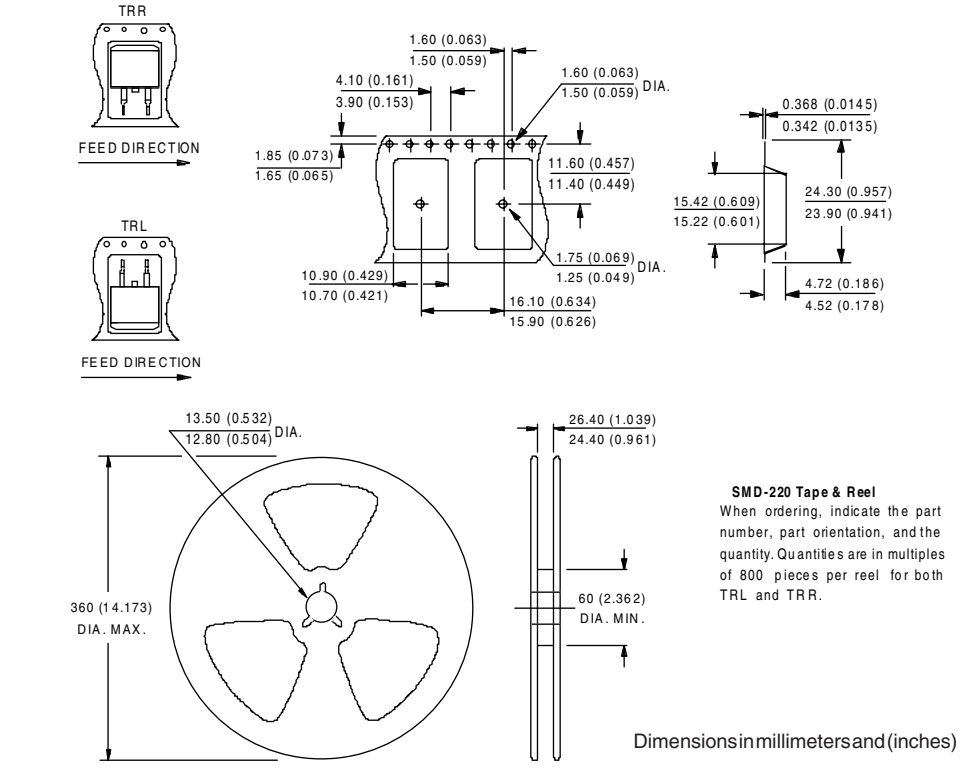


SMD-220 Tape & Reel
When ordering, indicate the part number, part orientation, and the quantity. Quantities are in multiples of 800 pieces per reel for both TRL and TRR.

Dimensions in millimeters and (inches)

Outline Table

Modified JEDEC outline TO-262
Dimensions in millimeters and (inches)

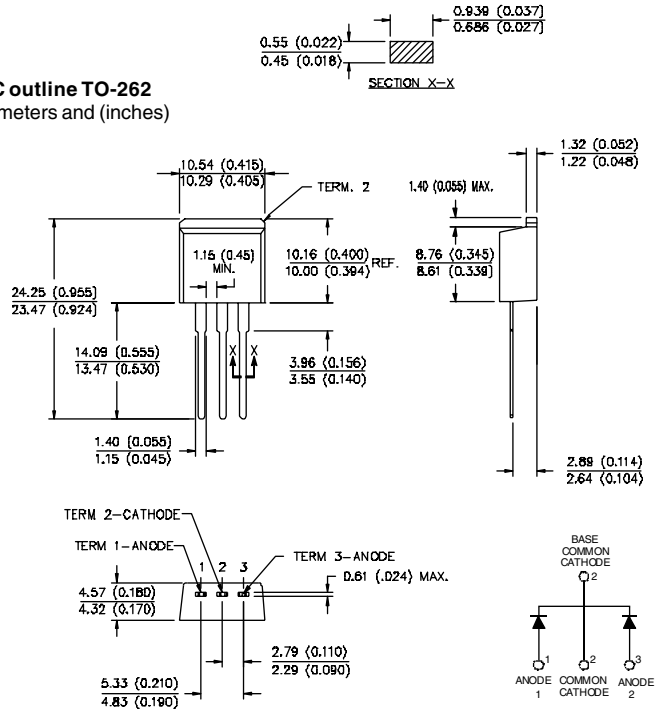

International
IOR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower,13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

http://www.irf.com Fax-On-Demand: +44 1883 733420 Data and specifications subject to change without notice.