



C



BEFOREHAND INSULATING TERMINAL WITH DOUBLE-WIRE INSERT

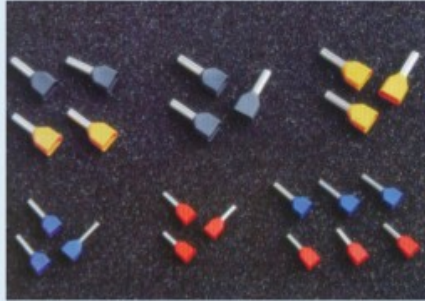

Beforehand insulating terminal with double-wire inser
Maximum compression resistance:105°C 300 VOLTS MAX.
The material of the terminal:tinning red copper pipe Insulating bushing:nylon

Electrical wire scope	Type	Diameter						Colour	The tool mode for impression and connection
		F	L	W	B	D	C		
		mm	mm	mm	mm	mm	mm		
2×22 A.W.G. 2×0.5mm ²	TE0508	8.0	14.5	5.0	3.6	1.8	1.5	□ White ■ Orange	
2×20 A.W.G. 2×0.75mm ²	TE7508	8.0	14.5	5.5	3.6	2.1	1.8	■ Blue □ White	
	TE7510	10.0	16.7						
2×18 A.W.G. 2×1.0mm ²	TE1008	8.0	15.1	5.5	4.0	2.3	2.0	■ Red ■ Yellow	
	TE1010	10.0	17.1						
2×16 A.W.G. 2×1.5mm ²	TE1508	8.0	15.5	6.4	4.2	2.6	2.3	■ Black ■ Red	
	TE1512	12.0	19.5						
2×14 A.W.G. 2×2.5mm ²	TE2510	10.0	18.5	8.0	5.0	3.3	2.9	■ Gray ■ Blue	
	TE2513	13.0	21.5						
2×12 A.W.G. 2×4mm ²	TE4012	12.0	23.1 10.0	8.8	5.7	4.2	3.8	■ Orange ■ Gray	
2×10 A.W.G. 2×6mm ²	TE6014	14.0	26.1	9.5	6.8	5.3	4.9	■ Green ■ Black	
2×8 A.W.G. 2×10mm ²	TE10-14	14.0	26.6	12.6	8.0	6.9	6.5	■ Palm □ Ivory	
2×6 A.W.G. 2×16mm ²	TE16-14	14.0	31.3	19.0	10.5	8.7	8.3	□ Ivory ■ Green	

PIPE TYPE BEFOREHAND INSULATING TERMINAL

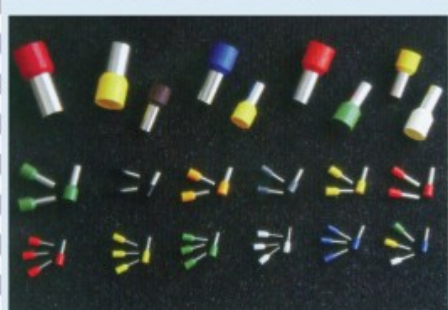

Pipe type beforehand insulating terminal Maximum compression resistance: 105°C 300 VOLTS MAX.
The material of the terminal: tinning red copper pipe Insulating bushing: nylon



Electrical wire scope	Type	Diameter							Colour	The tool mode for impression and connection			
		F	L	W	B	D	C						
		mm	mm	mm	mm	mm	mm						
22 A.W.G. 0.5mm ²	E0505	5.0	11.0	2.6	6.0	1.3	1.0	☐ White ☒ Orange	CEF-04WF Using the 0.5-caliber tongs				
	E0506	6.0	12.0										
	E0508	8.0	14.0										
	E0510	10.0	16.0										
	E0512	12.0	18.0										
20 A.W.G. 0.75mm ²	E7506	6.0	12.3	2.8	6.3	1.5	1.2	☒ Blue ☐ White	CEF-04WF Using the 0.75-caliber tongs				
	E7508	8.0	14.3										
	E7510	10.0	16.3	2.8	6.3								
	E7512	12.0	18.3										
	E7518	18.0	24.3										
18 A.W.G. 1.0mm ²	E1006	6.0	12.3	3.0	6.3	1.7	1.4	☒ Red ☐ Yellow	CEF-04WF Using the 1.0-caliber tongs				
	E1008	8.0	14.3										
	E1010	10.0	16.3	3.0	6.3								
	E1012	12.0	18.3										
	E1018	18.0	24.3										
16 A.W.G. 1.5mm ²	E1508	8.0	14.3	3.5	6.3	2.0	1.7	☒ Black ☐ Red	CEF-04WF Using the 1.5-caliber tongs				
	E1510	10.0	16.3	3.5	6.3								
	E1512	12.0	18.3										
	E1515	15.0	21.3										
	E1518	18.0	24.3										
14 A.W.G. 2.5mm ²	E2508	8.0	15.4	4.0	7.4	2.6	2.3	☐ Gray ☒ Blue	CEF-04WF Using the 2.5-caliber tongs				
	E2510	10.0	17.4										
	E2512	12.0	19.4										
	E2518	18.0	25.4										
	E2525	25.0	32.4										
12 A.W.G. 4.0mm ²	E4009	9.0	16.4	4.5	7.4	3.2	2.8	☐ Orange ☐ Gray	CEF-04WF Using the 4.0-caliber tongs				
	E4010	10.0	17.4										
	E4012	12.0	19.4										
	E4018	18.0	25.4										

CRLMPING TOOLS

CAT.NO.	Product Photo	WIRE RANGE FOR CRIMPING
ID-06WF		0.25mm ² ~6mm ²



PIPE TYPE BEFOREHAND INSULATING TERMINAL

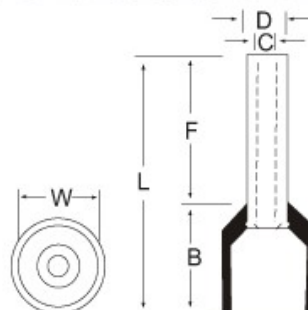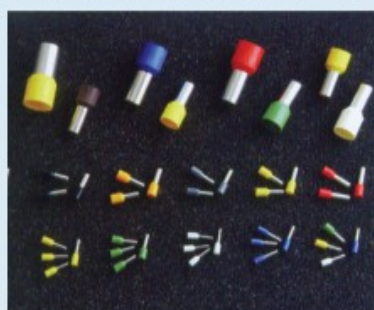

Pipe type beforehand insulating terminal Maximum compression resistance: 105°C 300 VOLTS MAX.
The material of the terminal: tinning red copper pipe Insulating bushing: nylon

Electrical wire scope	Type	Diameter						Colour	The tool mode for impression and connection
		F	L	W	B	D	C		
		mm	mm	mm	mm	mm	mm		
10 A.W.G. 6.0mm ²	E6012	12.0	20.5	6.0	8.5	3.9	3.5	■ Green	CEF-16WF Using the 6.0-caliber tongs
	E6018	18.0	26.5					■ Black	
8 A.W.G. 10mm ²	E10-12	12.0	20.8	7.5	8.8	4.9	4.5	■ Brown	CEF-16WF Using the 10-caliber tongs
	E10-18	18.0	26.8					□ Ivory	
6 A.W.G. 16mm ²	E16-12	12.0	22.0	8.7	10.0	6.2	5.8	□ Ivory	CEF-16WF Using the 16-caliber tongs
	E16-18	18.0	28.0					■ Green	
4 A.W.G. 25mm ²	E25-12	12.0	24.0	11.0	12.0	7.9	7.5	■ Black ■ Yellow	KST2000N Using the 25-caliber tongs
	E25-15	15.0	27.0						
	E25-16	16.0	28.0						
	E25-18	18.0	30.0						
	E25-22	22.0	34.0						
2 A.W.G. 35mm ²	E35-16	16.0	30.0	12.5	14.0	8.7	8.3	■ Red □ Ivory	KST2000N Using the 35-caliber tongs
	E35-18	18.0	32.0						
	E35-22	22.0	36.0						
	E35-25	25.0	39.0						
1/0 A.W.G. 50mm ²	E50-12	12.0	28.0	15.0	16.0	10.9	10.3	■ Blue ■ Green	KST2000P Using the 50-caliber tongs
	E50-20	20.0	36.0						
	E50-25	25.0	41.0						
2/0 A.W.G. 70mm ²	E70-20	20.0	37.0	16.0	17.0	14.3	13.5	■ Yellow ■ Yellow	
	E70-25	25.0	42.0						
	E70-27	27.0	44.0						
3/0 A.W.G. 95mm ²	E95-25	25.0	44.0	18.5	19.0	16.3	14.5	■ Red ■ Red	
4/0 A.W.G. 120mm ²	E120-27	27.0	47.6	20.3	20.6	17.5	16.5	■ Blue ■ Blue	
	E120-32	32.0	52.6						
250/300MCM A.W.G. 150mm ²	E150-25	25.0	50.6	23.4	25.6	20.6	19.6	■ Yellow ■ Yellow	
	E150-27	27.0	52.6						
	E150-32	32.0	57.6						

CRLMPING TOOLS

CAT.NO.	Product Photo	WIRE RANGE FOR CRIMPING
IDC8 6-4		6mm ² ~16mm ²